

SMC-150/152(F) 15" Flat Screen Color Monitor



• DURABLE METAL CASE DESIGN

SMC-150F/152F features a metal case, sturdy construction and is designed and built as a security monitor.

• 2 BNC / 4 BNC




SMC-150F
2BNC Video



SMC-152F
4BNC Video

Dimensions (unit : in)

Rear Panel

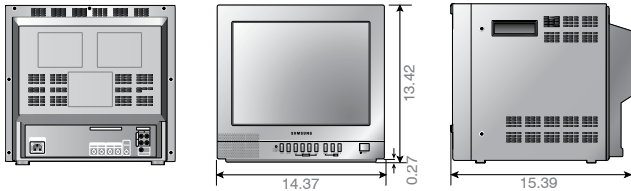

Summary

SMC-150/152F is a 15" color monitor housed in a metal case featuring video and audio looping. This color monitor features a sturdy construction and is specifically designed and built for security.

With 400TV Lines of resolution, the monitor delivers high quality video images on a 15" CRT with a flat screen. SMC-150/152F is equipped with an auto-sensing universal power supply supporting NTSC and PAL modes. Automatic 75 Ohm termination and on screen display programming make this monitor an ideal choice for system integration and other viewing environments. SMC monitor series by SAMSUNG Electronics are world renowned for their high quality video image.

Features

- 15 Inch Flat CRT monitor
- 400TV Lines Resolution
- NTSC/PAL Modes
- Automatic 75 Ohm Termination
- Switch Selectable Looping Video Inputs (2 BNC, 1 VCR), SMC-150F
- Switch Selectable Video Inputs (4 BNC, 1 VCR), SMC-152F
- Maximum 1.5W Speaker Output
- Auto Switching Sequence With Interval Selection, SMC-152F
- Rugged Metal Cabinet

Recommended Accessories

GV-CMM1, Ceiling Mount for 12~21" Monitors
GV-MM2, Wall Mount for 12~21" Monitors

Specifications

Model		SMC-150F	SMC-152F
Picture	CRT	15" / 38cm Diagonal, 0.6mm Stripe Pitch, 90° Deflection	
	Resolution	400TV lines	
Video	Input	2 Channel, 1 VCR (1Vp-p 75 ohm)	4 Channel, 1 VCR (1Vp-p 75 ohm)
	Output	2 Channel (1Vp-p 75 ohm)	1 Channel (1Vp-p 75 ohm)
Audio	Input	2 Channel RCA, 1 VCR RCA	4 Channel RCA, 1 VCR RCA
	Output	2 Channel RCA	1 Channel RCA
	Speaker Output	1.5W Max.	
System	Modes	NTSC & PAL	
Control	Front	Volume, Contrast, Brightness, Color Tint, Sharpness and Input Select	
Connector Rear	Video	2 BNC Input/Outputs (Composite), 1 BNC VCR Input	4 BNC Input/Outputs (Composite), 1 BNC VCR Input
	Audio	2 RCA Input/Outputs, 1 RCA VCR Input	4 RCA Input/Outputs, 1 RCA VCR Input
Stabilization	Horizontal	Pull in Range ± 500Hz Holding Range ± 500Hz	
	Vertical	Pull in Range ± 4 Hz Holding Range ± 4 Hz	
	Sub carrier	Pull in Range ± 400Hz Holding Range ± 400Hz	
Convergence	Center	Less Than 0.4mm	
Operating Temperature		14° ~ 122°F / -10° ~ +50°C	
Operating Humidity		10% ~ 90%	
Power Source		120VAC, 60Hz/230VAC, 50Hz	
Power Consumption		50W	
Physical Specification	Dimension (W x H x D)	14.37 x 15.39 x 13.46 in / 365 x 391 x 342 mm	
	Weight	36.38lb / 16.5Kg	
Certifications		UL, FCC	